



ADMT
Advanced Dimensional Measuring Technology

신뢰할 수 있는 선택. 3차원측정 대표기업

3D Scanner. 5축 3차원측정기. GD&T. CMM. 측정서비스. 역설계서비스

충북 청주시 서원구 남이면 척산1길 29-2(28182)
Tel : +82-42-482-0621
Mobile : +82-10-4614-8551
www.admt.kr



SCANTECH (HANGZHOU) CO., LTD. (HQ)

☎ 0086 571-85370380 ✉ info@3d-scantech.com
☎ 0086 571-85370381 🌐 www.3d-scantech.com
📍 Building 12, No.998, West Wenyi Road, Yuhang District, Hangzhou, Zhejiang, China

SCANTECH DIGITAL Inc.

✉ info@3d-scantech.com
📍 15375 Barranca Parkway, Suite B-103,
Irvine, CA 92618

SCANTECH DIGITAL GmbH.

☎ +49 (0) 711 3101390 1 ✉ europe@3d-scantech.com
📍 Dieselstrasse 18, 70771 Leinfelden-Echterdingen,
Echterdingen industrial park

Korean Office

☎ +82 10 3548 2131
✉ kevin.park@3d-scantech.com

Indian Office

☎ +91 98995 70628
✉ arshad.jamal@3d-scantech.com

Brazilian Office

☎ +55-11981521697
✉ gerson.souza@3d-scantech.com

Mexican Office

☎ +52 1 55 4850 8719
✉ ricardo.castellanos@3d-scantech.com



SIMSCAN GEN2

Smart Handheld 3D Scanner



**FAST PRECISE POWER
IN YOUR PALM**

SIMSCAN GEN2 is a palm-sized industrial 3D laser scanner engineered for precise scanning for small to normal-sized part even in tight, hard-to-reach spaces. Its lightweight, ergonomic design ensures comfortable and long-term use.

Powered by advanced algorithms and 27 laser crosses, SIMSCAN delivers fast data capture with a measurement rate of up to 13.3 million measurements/s. Recognized with the German Red Dot and China Design Silver Awards, it stands out as a sleek, efficient, and user-friendly tool—ideal for professionals and newcomers to high-precision 3D scanning.

5,800,000
measurements/s

ISO & VDI/VDE
certified

0.020 mm
accuracy

27
laser crosses



Sleek and Compact

SIMSCAN GEN2 features a sleek, ergonomic design with a full-metal, aerospace-grade housing for durability and comfort. Compact and lightweight, it fits easily in one hand for effortless scanning, even in tight spaces. It combines style, strength, and usability in one compact device.

Dimension

203 mm × 80 mm × 44 mm

Certified

570 g



Flexible Modes for Diverse Needs

The 3D laser scanner offers three scanning modes, adapting to diverse needs. Easy to use for both professionals and beginners, it effortlessly handles GD&T measurements, assembly analysis, maintenance, modifications and more.



Ultra-fast scanning



Hyperfine Scanning



Deep hole Scanning





신뢰할 수 있는 선택. 3차원측정 대표기업

3D Scanner, 5축 3차원측정기, GD&T, CMM, 측정서비스, 역설계서비스

충북 청주시 서원구 남이면 혁신1길 29-2(28182)
Tel : +82-42-482-0621
Mobile : +82-10-4614-8551
www.admt.kr





High-Speed Scanning

It enables fast 3D scanning with a measurement rate of up to 5.8 million measurements/s. Powered by advanced algorithms, 27 blue laser crosses and fast data capturing, it ensures smooth and efficient 3D digitizing to obtain precise digital twins.

5,800,000
measurements/s



Excellent for Details


Equipped with 17 parallel laser lines, it rapidly generates point clouds for efficient, high-precision data capture—even in tight spaces.

17
parallel laser lines

It excels at capturing complex structures, fine details and even black and reflective surfaces. An additional blue laser line is dedicated to deep-hole scanning, making it ideal for accessing confined areas such as holes and slots. Ideal for thorough inspection of complex parts.




Complex structures



Fine details



Black surfaces



Reflective surfaces

Industrial-grade Accuracy

SIMSCAN GEN2 delivers high-precision 3D measurements with an accuracy of up to 0.020 mm and high repeatability, making it ideal for applications that demand meticulous detail and reliability. Its metrology-grade performance ensures consistent, accurate results across various industrial scenarios, from product development to quality inspection.

Cater to Needs of Various Sectors

Aerospace

Metrology-grade 3D scanning for product development and MRO workflow.



Energy & Heavy Industry

Empower the development of the energy industry and promote the upgrading of the heavy machine industry.



Automotive

Enhance work efficiency with precise 3D measurement instruments from concept design to manufacturing.



Rail Transport and Shipbuilding

Provide accurate measurement results for product development, virtual assembly, and repeatable analysis.



Mold

Portable 3D scanner to optimize mold design, mode corrosion detection and archiving.




Non-industry

To meet the needs for 3D digitization for industries, including medical field, architecture, science, education and entertainment.



DefinSight to Power 3D Scanning

- An all-in-one software
- Fast data processing
- Real-time Meshing
- Compare scans to CAD data
- Intuitive reports

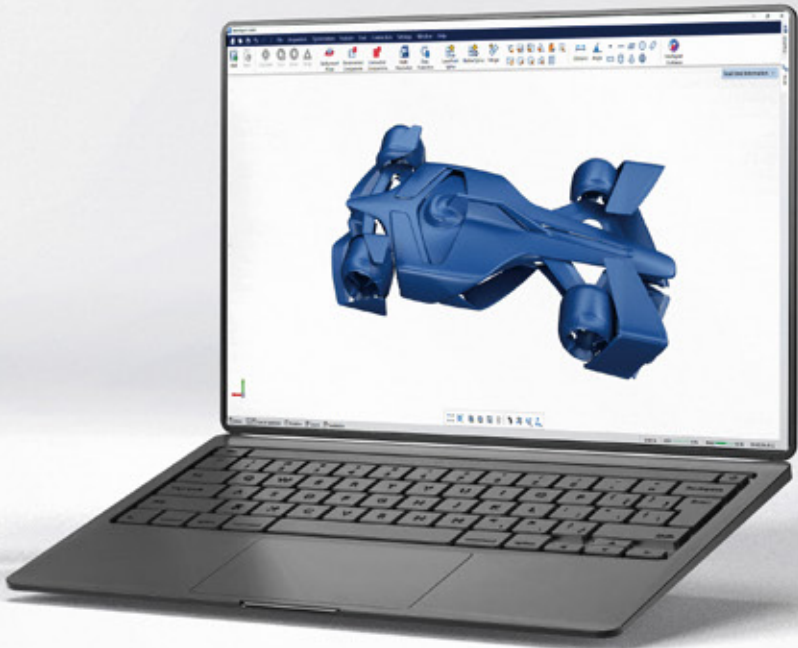

Automated 3D Measurement

The 3D scanner can be integrated with SCANTECH's automated 3D measurement systems to enable continuous, high-volume inspections. This setup eliminates the constraints of manual methods and greatly enhances efficiency across all stages of the manufacturing process.



Type		SIMSCAN 30 GEN2	SIMSCAN 42 GEN2
Scan mode	Ultra-fast scanning	17 blue laser crosses	27 blue laser crosses
	Hyperfine scanning	17 blue parallel laser lines	
	Deep hole scanning	1 extra blue laser line	
Accuracy ⁽¹⁾		Up to 0.020 mm	
Scanning rate up to		4,580,000 measurements/s	5,800,000 measurements/s
Scanning area up to		700 mm × 600 mm	
Laser class		Class II (eye-safe)	
Resolution up to		0.020 mm	
Volume accuracy ⁽²⁾	Standard	0.015 mm + 0.035 mm/m	
	Paired with MSCAN-L15	0.015 mm + 0.012 mm/m	
Stand-off distance		300 mm	
Depth of field		550 mm	
Output formats		.stl, .obj, .ply, .asc, .igs, .txt, .mk2, .umk and etc.	
Interface mode		USB 3.0	
Dimensions		203 mm × 80 mm × 44 mm	
Weight		570 g	
Operating temperature range		-10°C - 40°C	
Operating humidity (non-condensing)		10 - 90% RH	
Patents		CN204329903U, CN104501740B, CN204854633U, CN204944431U, CN204902788U, CN105068384B, CN105049664B, CN204902784U, CN204902785U, CN106403845B, CN110030946B, CN212300269U, CN211904059U, CN211696268U, CN306053019S, CN212606697U, CN306321502S, CN214149177U, CN214747767U, CN216115893U, CN114001671B, CN113470180B, CN113218417B, CN111833392B, CN115682981B	

(1) ISO 17025 accredited: Based on VDI/VDE 2634 Part 3 standard and JJF 1951 specification, probing error (size) (PS) performance is evaluated.
(2) ISO 17025 accredited: Based on VDI/VDE 2634 Part3 standard and JJF 1951 specification, sphere spacing error (SD) performance is evaluated.

